


Specifications KTK063-BA


Subject to change, production tolerances have to be taken into account.

Basic data

Tank volume	75 l [19.8 US gal]		
Return oil filter	60 l/min [15.9 US gpm]		
Breather cartridge	in the Return oil filter		
Oil gauge	1x		
Material	Tank: Bearer: Tightening band:	Steel zinc-coated / Aluminium Powder coating Stainless steel	
Weight	30 kg [66 lb]		

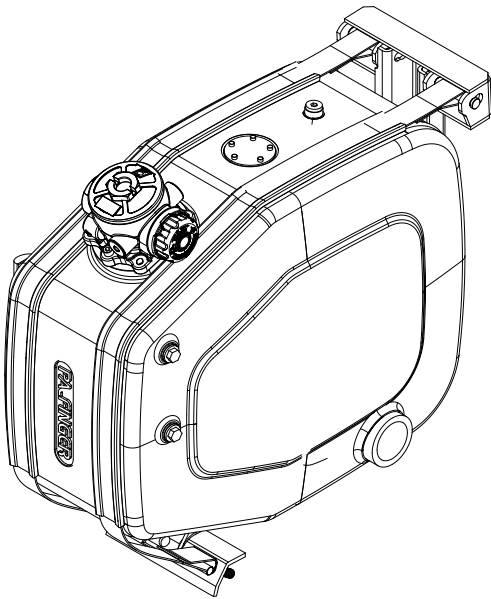

Subject to change, production tolerances have to be taken into account.

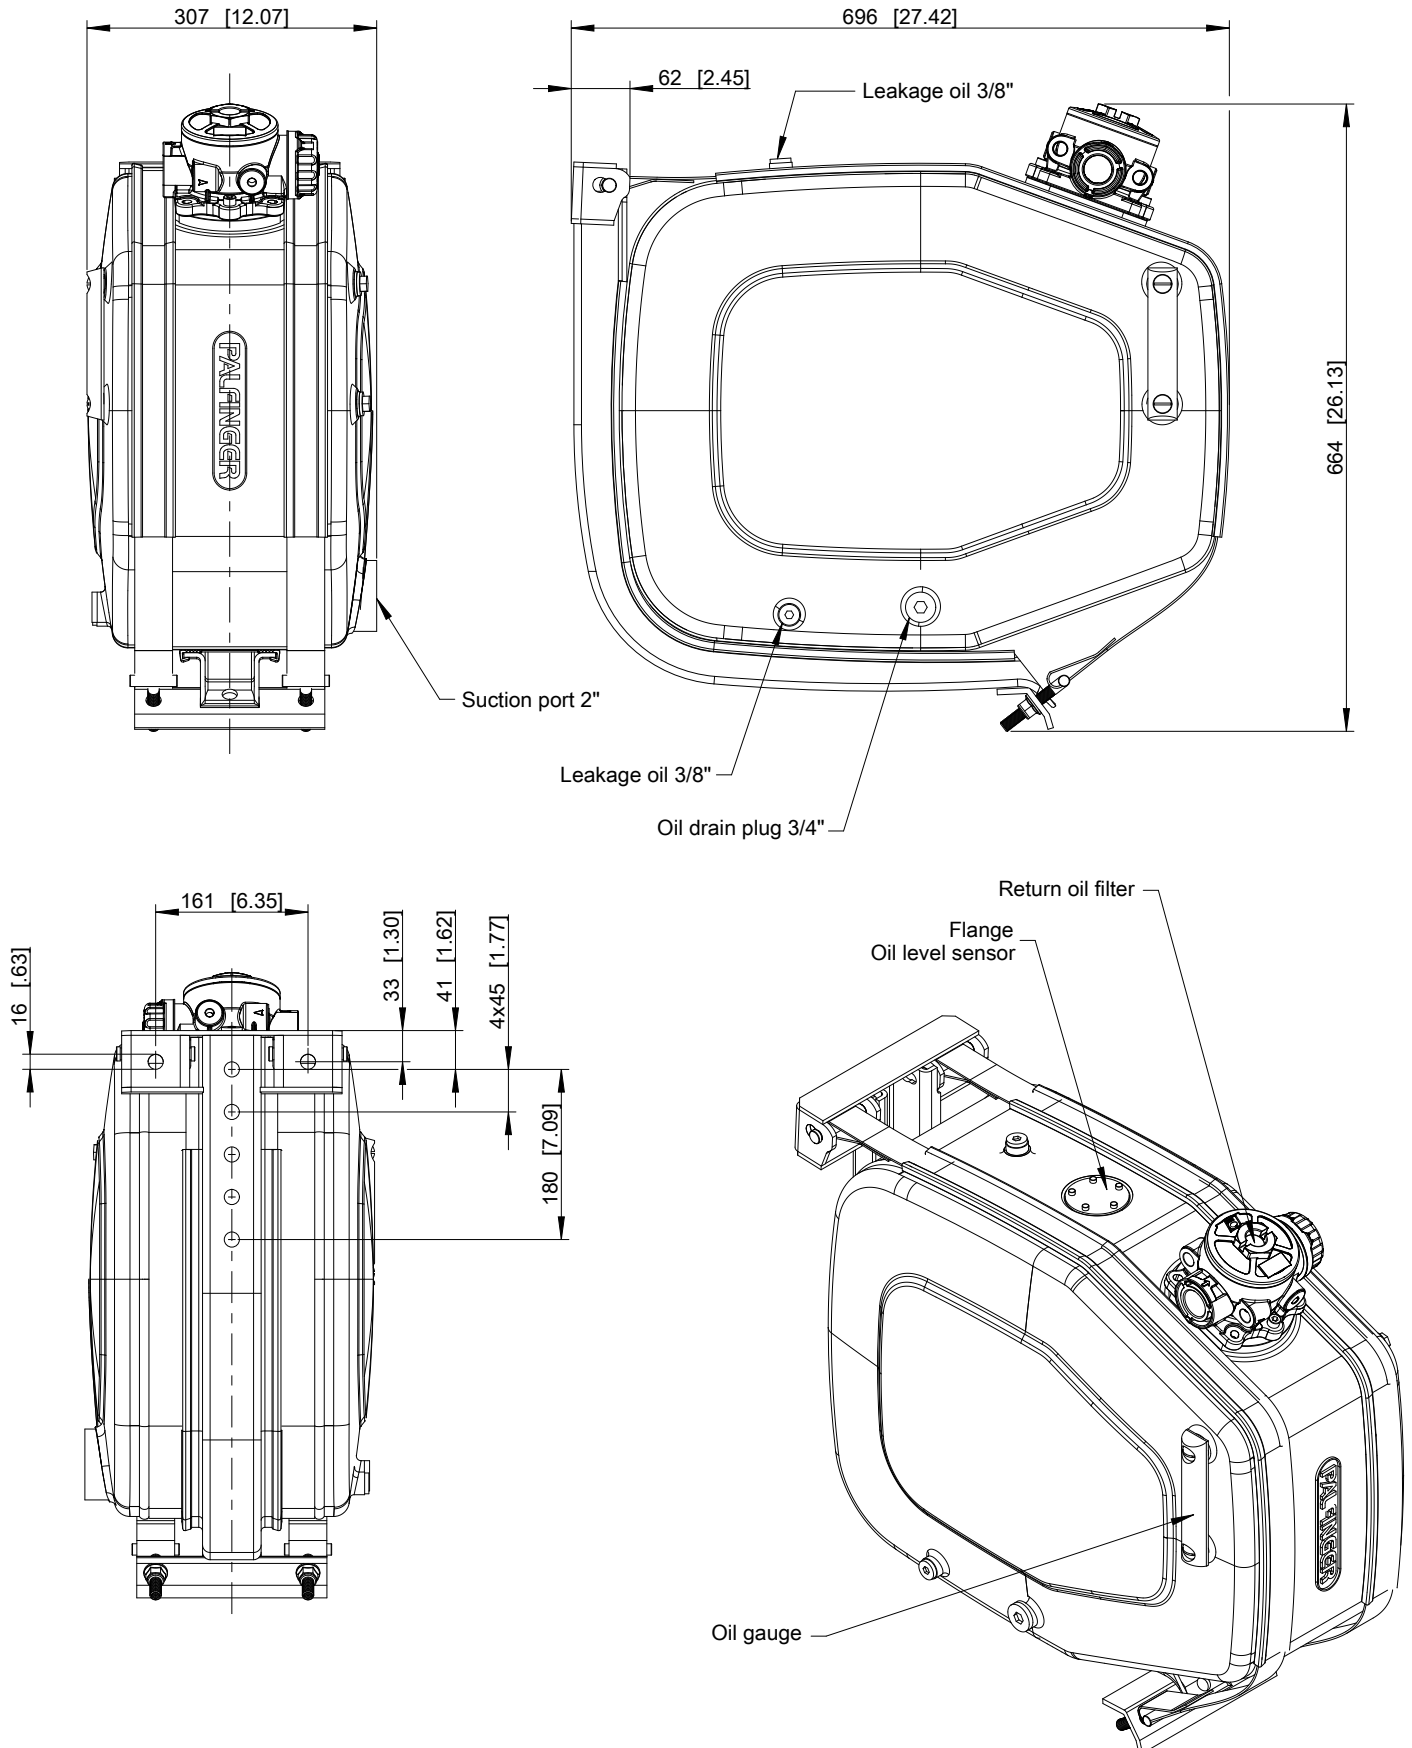


Specifications KTK064-BA


Subject to change, production tolerances have to be taken into account.

Basic data

Tank volume	100 l [26.4 US gal]
Return oil filter	180 l/min [47.6 US gpm]
Breather cartridge	included
Oil gauge	1x
Material	<div> <div> Tank: Bearer: Tightening band: </div> <div> Steel zinc-coated / Powder coating Stainless steel </div> </div>
Weight	32 kg [71 lb]

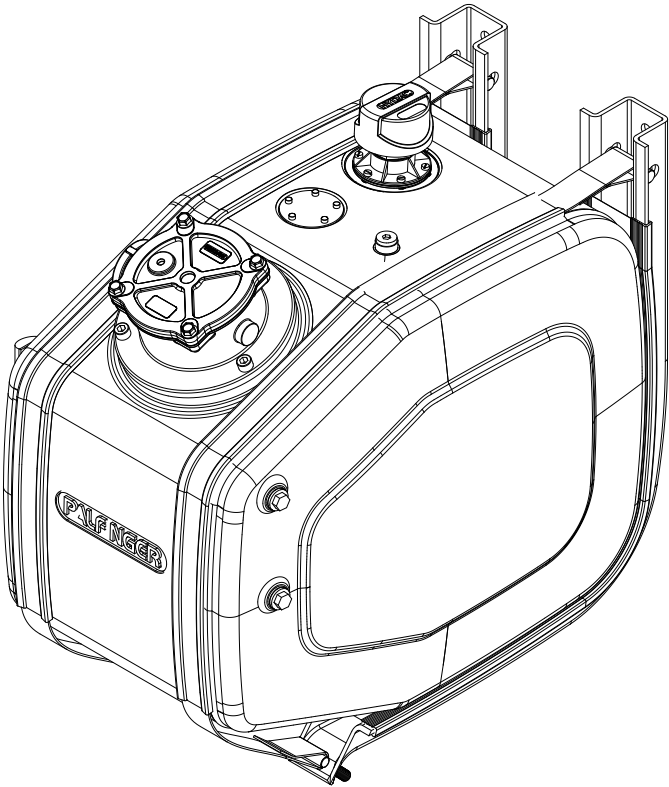

Subject to change, production tolerances have to be taken into account.

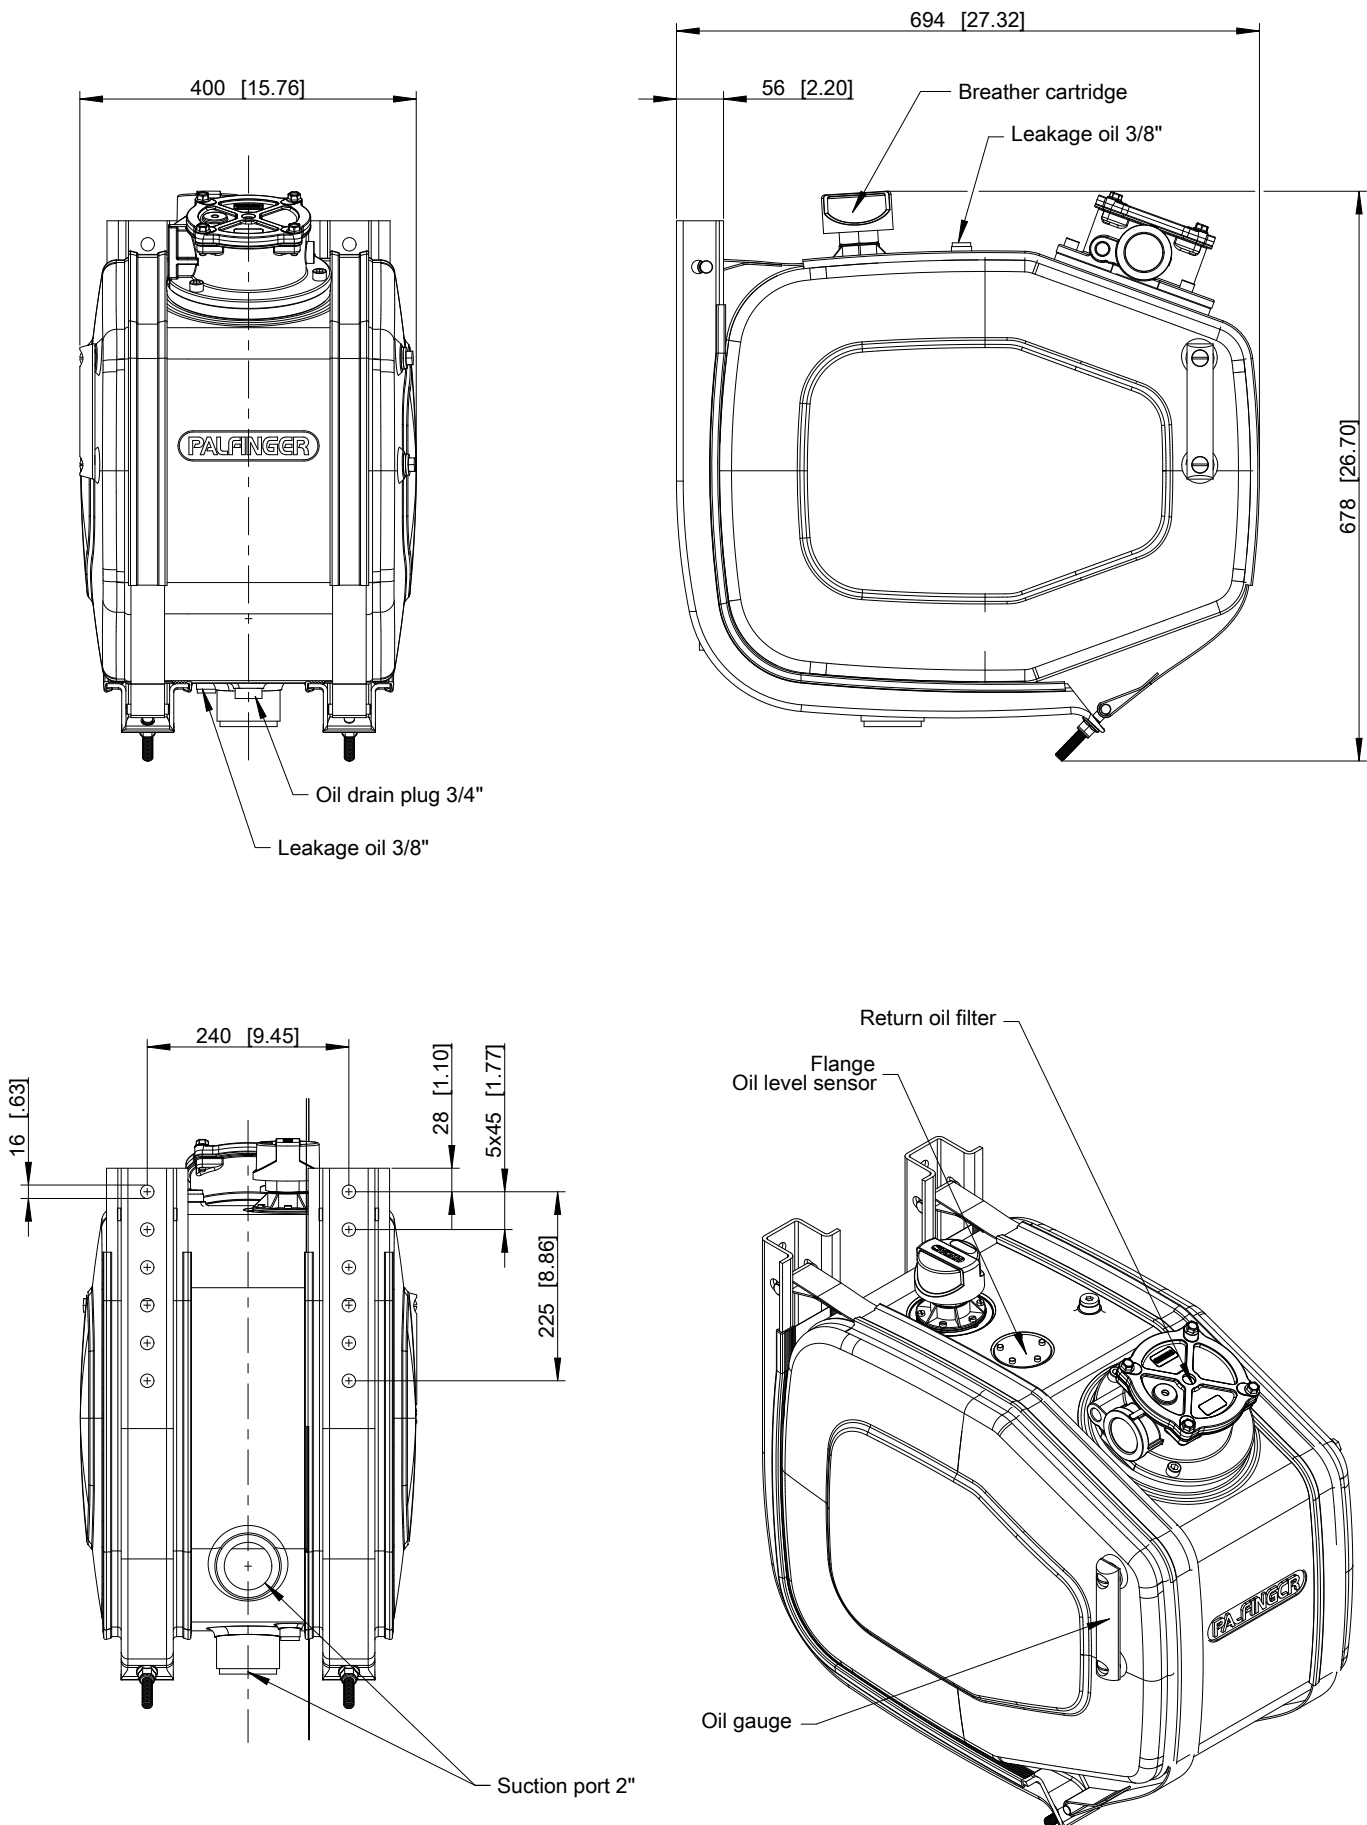


Specifications KTK065-BA


Subject to change, production tolerances have to be taken into account.

Basic data

Tank volume	140 l [37.0 US gal]
Return oil filter	180 l/min [47.6 US gpm]
Breather cartridge	included
Oil gauge	1x
Material	<div> <div>Tank:</div> <div>Bearer:</div> <div>Tightening band:</div> </div> <div> <div>Steel zinc-coated /</div> <div>Powder coating</div> <div>Stainless steel</div> </div> <div>Aluminium</div>
Weight	33 kg [73 lb]

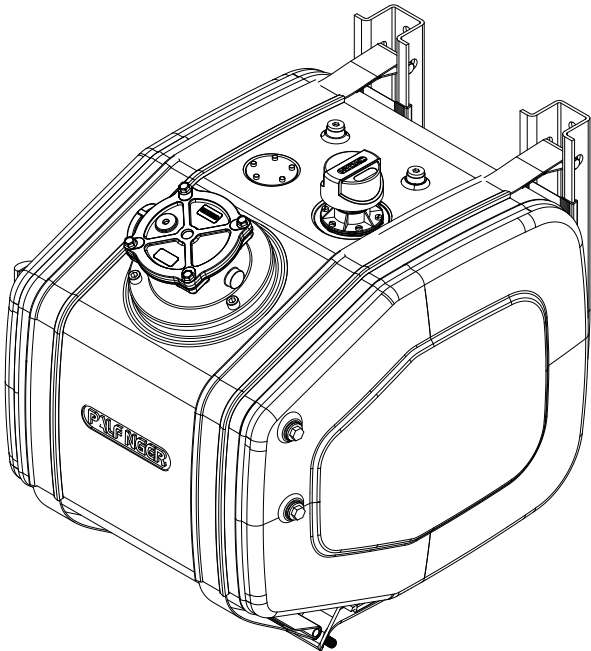

Subject to change, production tolerances have to be taken into account.

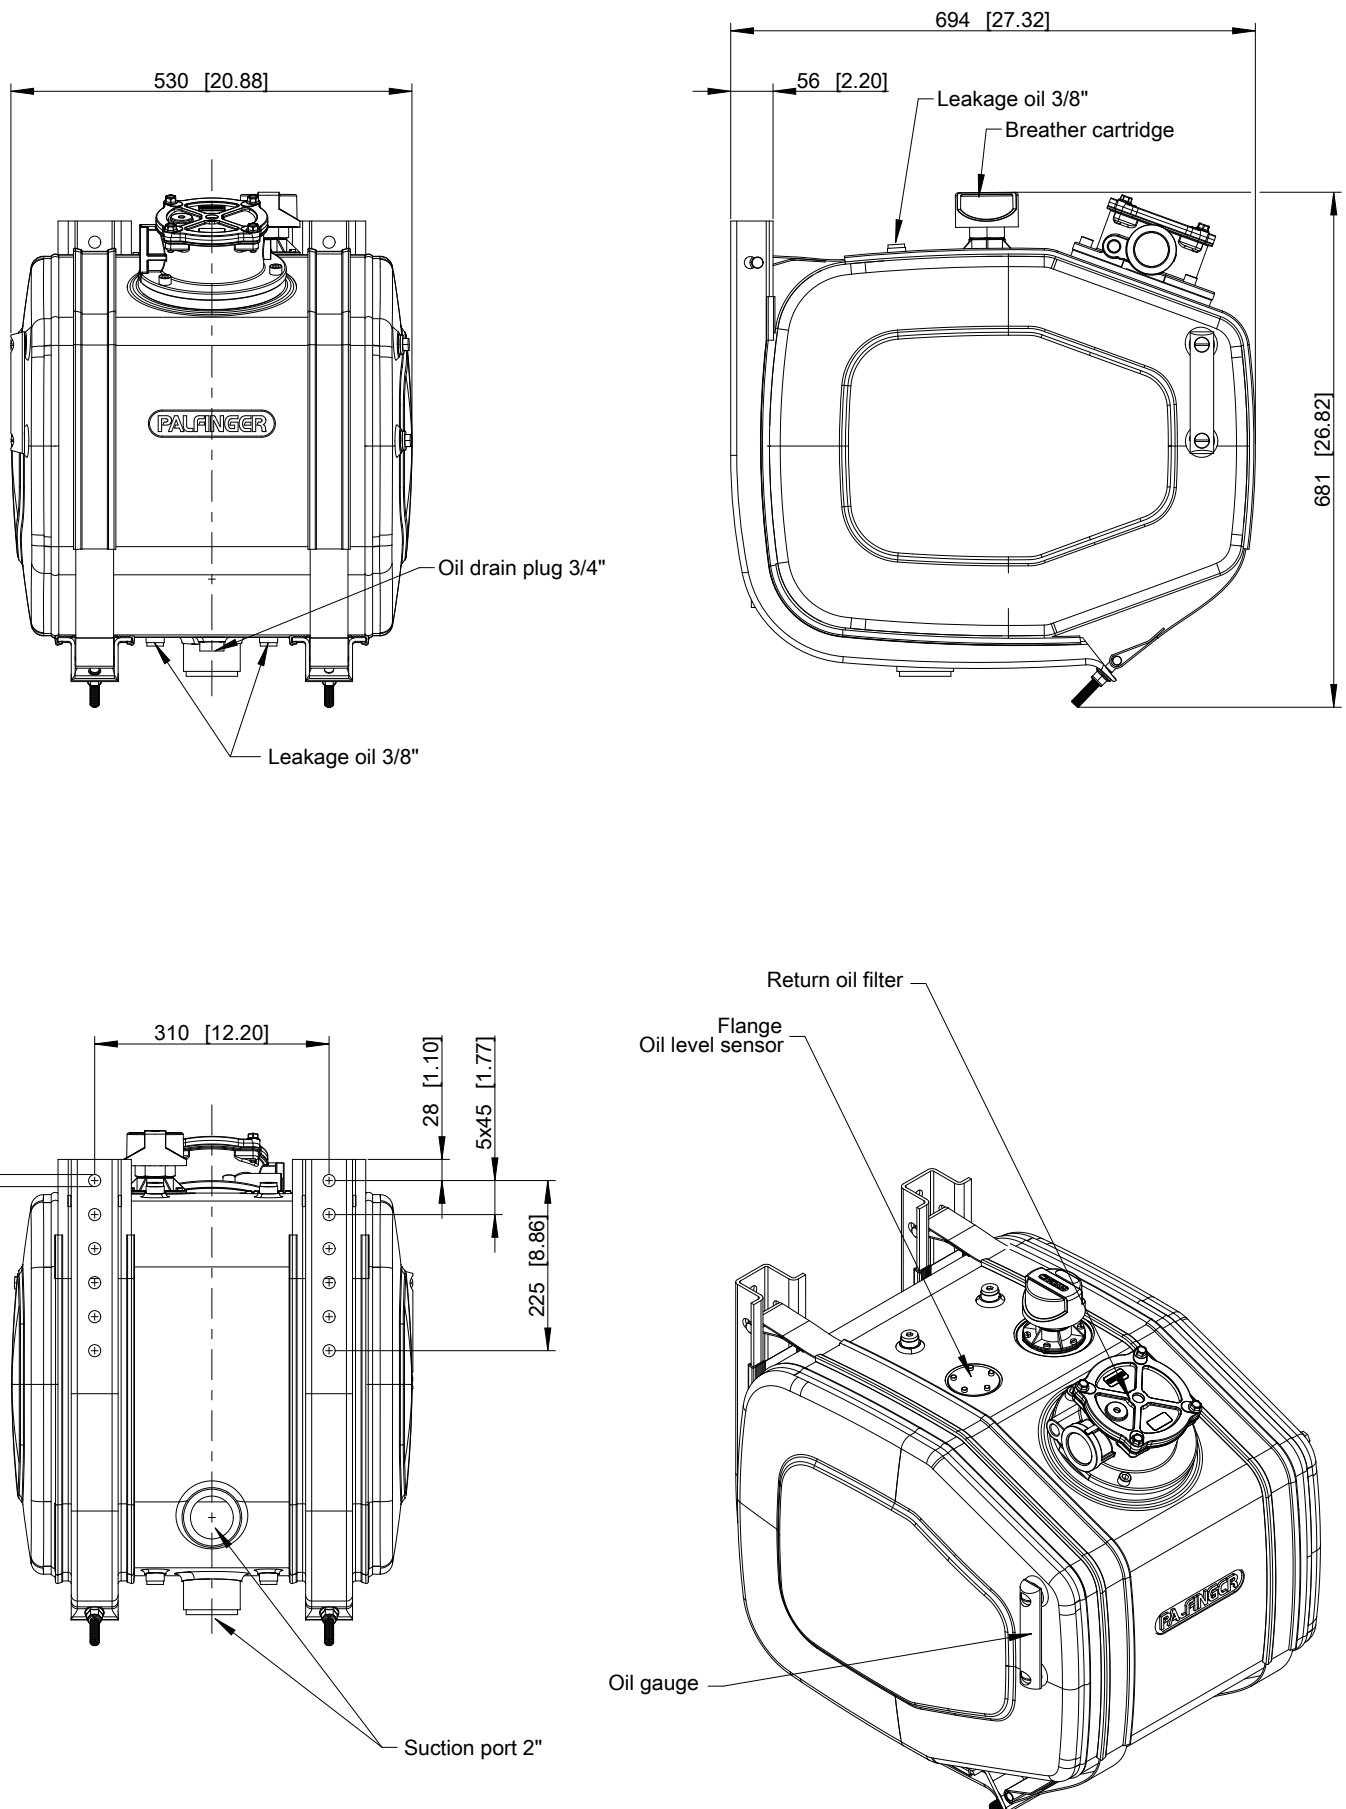


Specifications KTK066-BA





Subject to change, production tolerances have to be taken into account.

Basic data

Tank volume			200 l [52.8 US gal]
Return oil filter			180 l/min [47.6 US gpm]
Breather cartridge			included
Oil gauge			1x
Material	Tank: Bearer: Tightening band:	Steel zinc-coated /	Aluminium Powder coating Stainless steel
Weight			39 kg [86 lb]

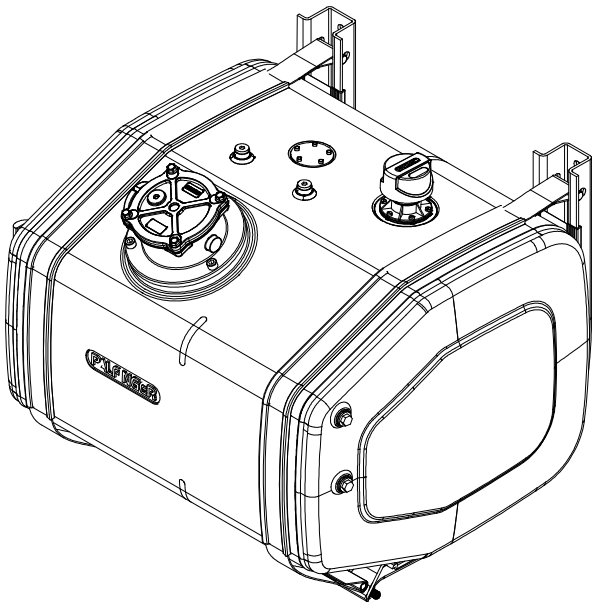

Subject to change, production tolerances have to be taken into account.

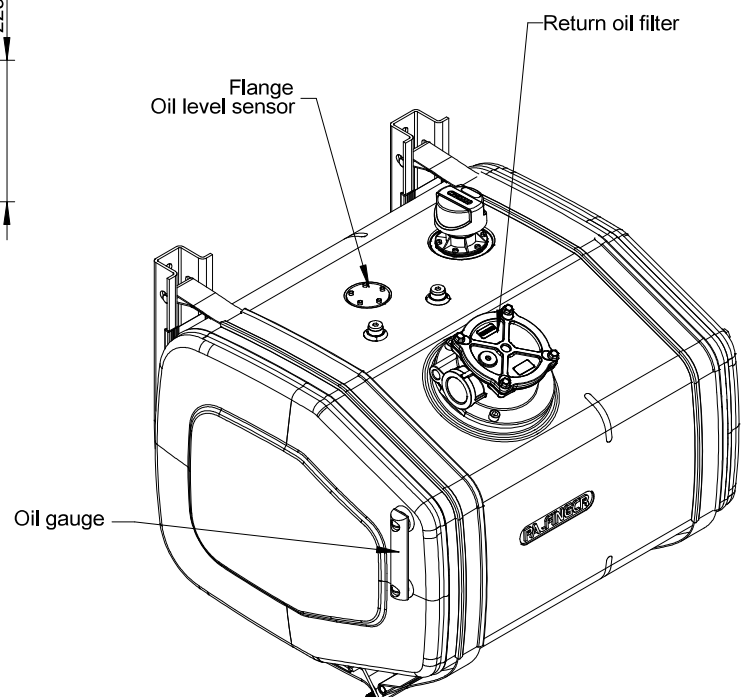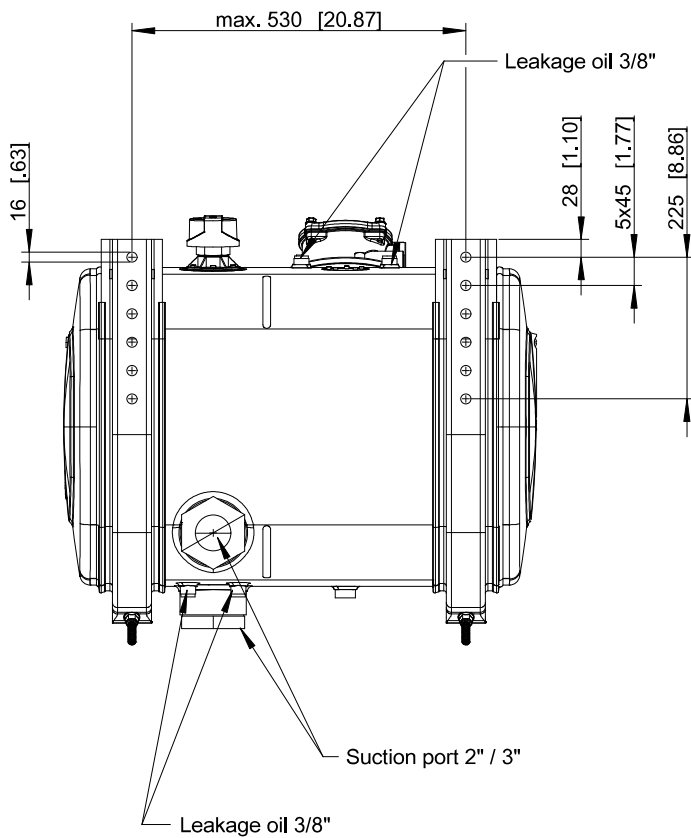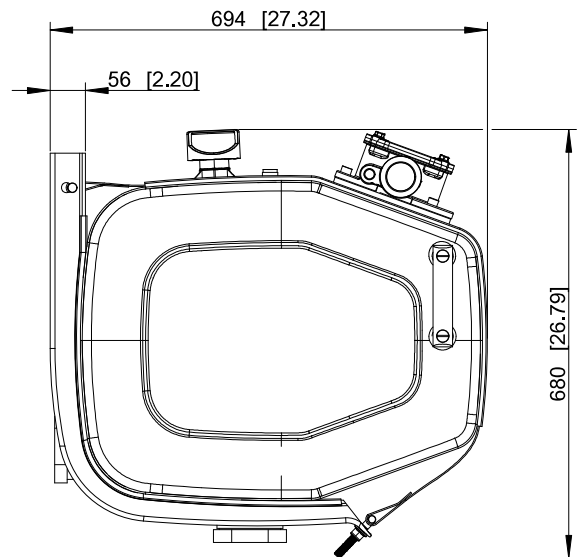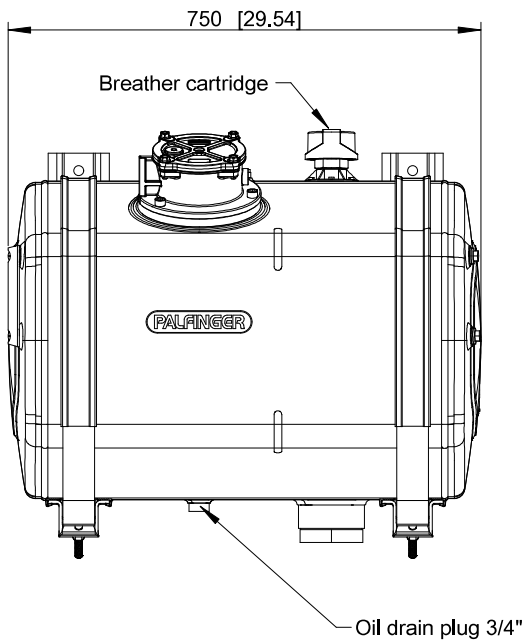




Specifications KTK067-BA

Subject to change, production tolerances have to be taken into account.

Basic data

Tank volume			250 l [66 US gal]
Return oil filter			350 l/min [92.5 US gpm]
Breather cartridge			included
Oil gauge			1x
Material	Tank: Bearer: Tightening band:	Steel zinc-coated /	Aluminium Powder coating Stainless steel
Weight			41 kg [90 lb]

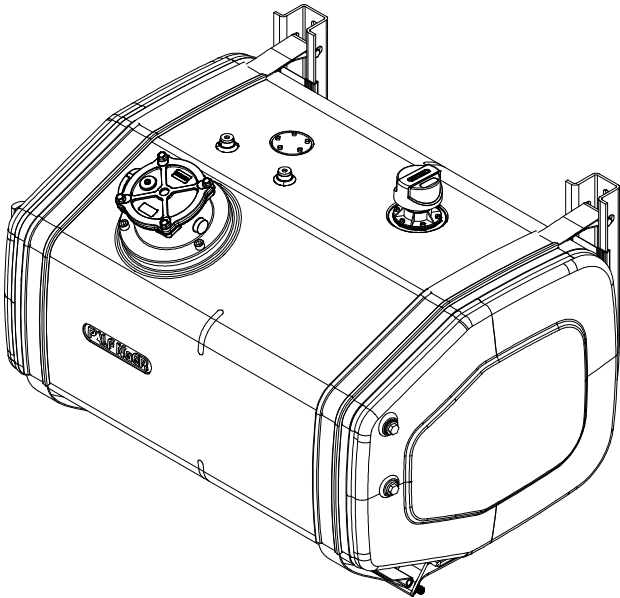


# Oil tank

050.02100

Dimensions KTK067-BA

Subject to change, production tolerances have to be taken into account.

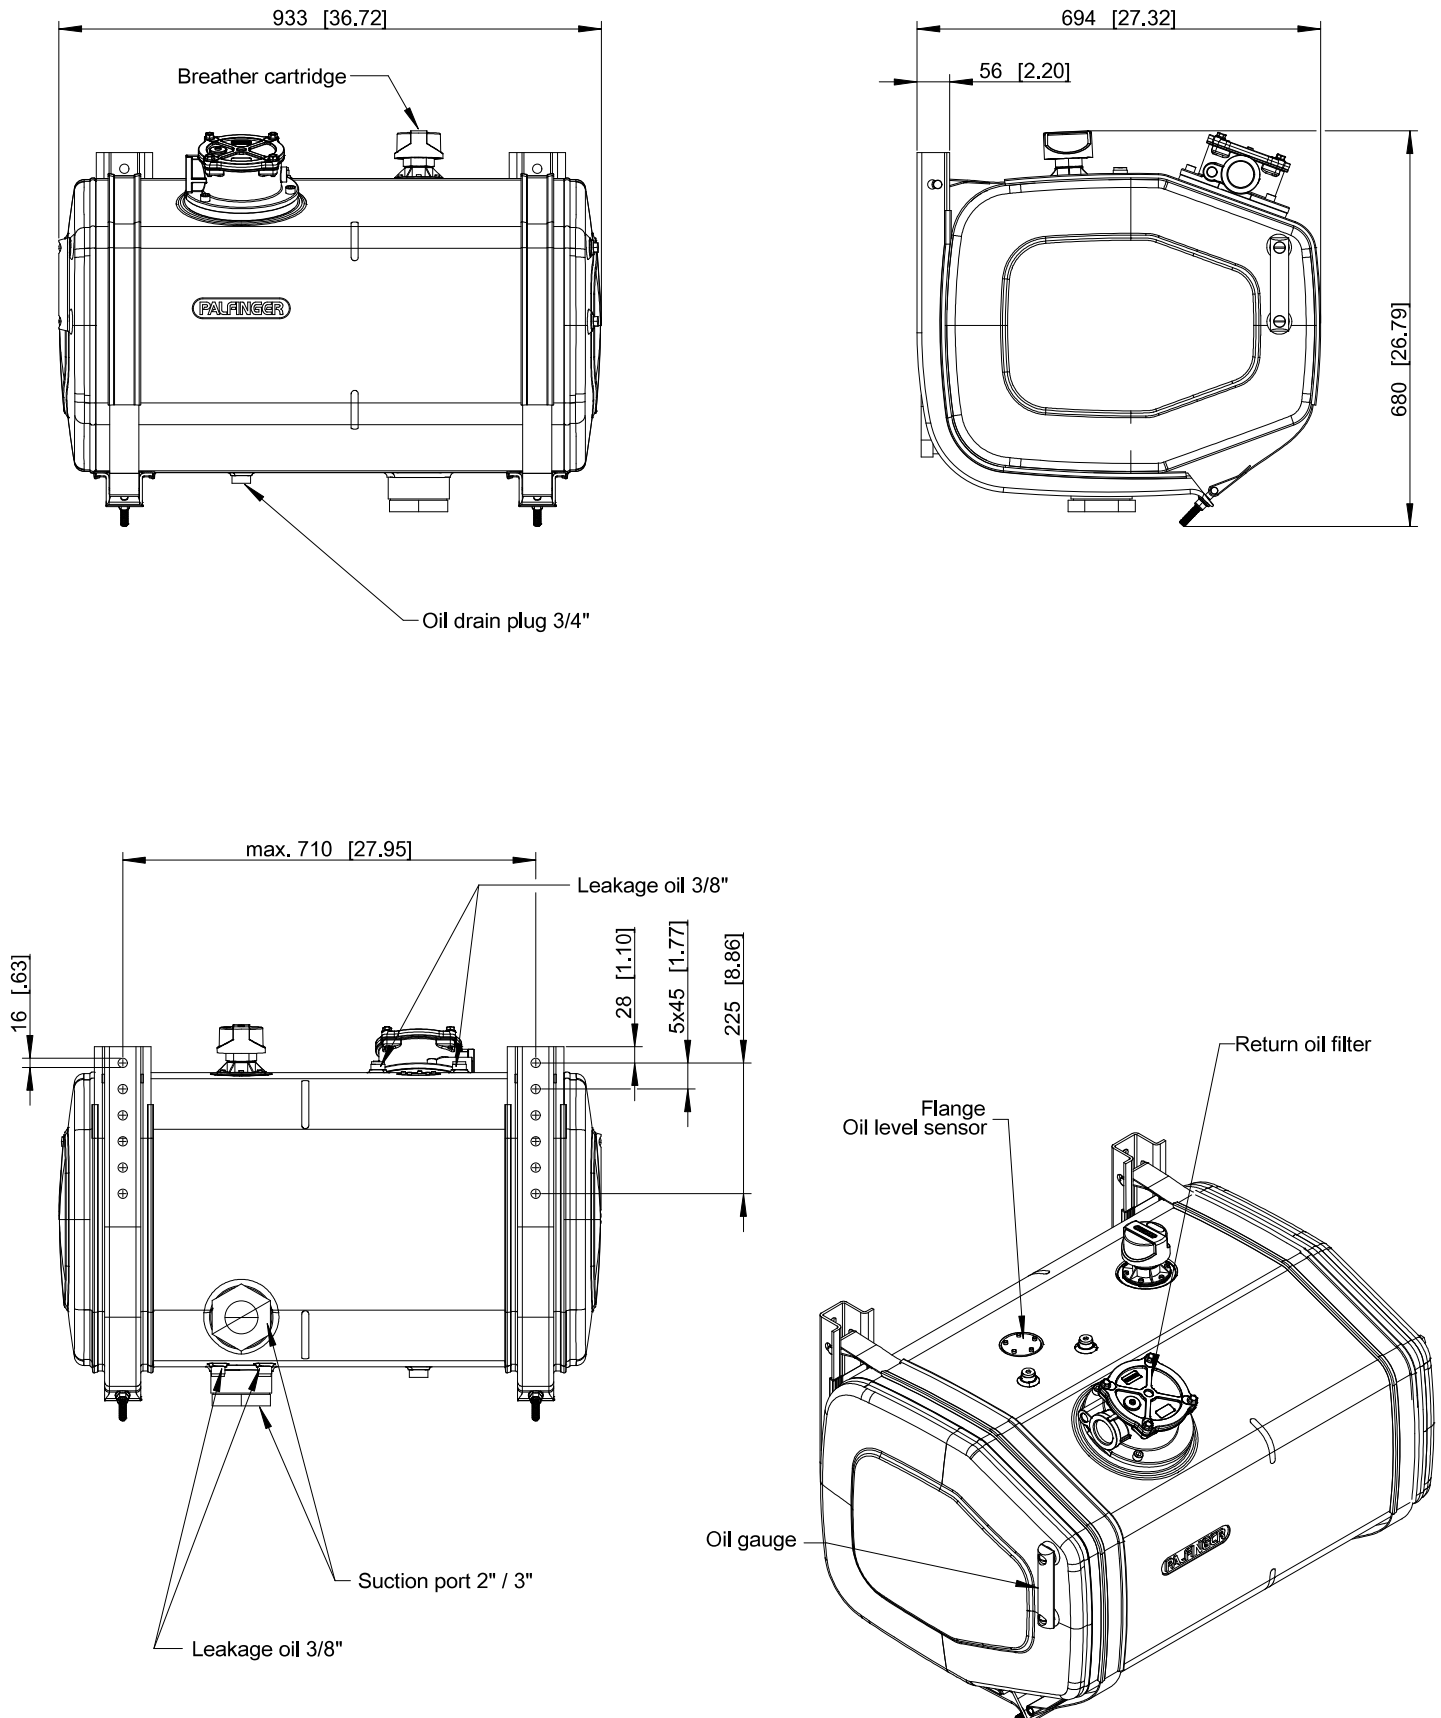


Specifications - KTK068-BA

Subject to change, production tolerances have to be taken into account.

Basic data

Tank volume	300 l [79.3 US gal]
Return oil filter	350 l/min [92.5 US gpm]
Breather cartridge	included
Oil gauge	1x
Material	<div> <div>Tank:</div> <div>Bearer:</div> <div>Tightening band:</div> </div> <div> Steel zinc-coated / Powder coating Stainless steel </div>
Weight	43 kg [95 lb]

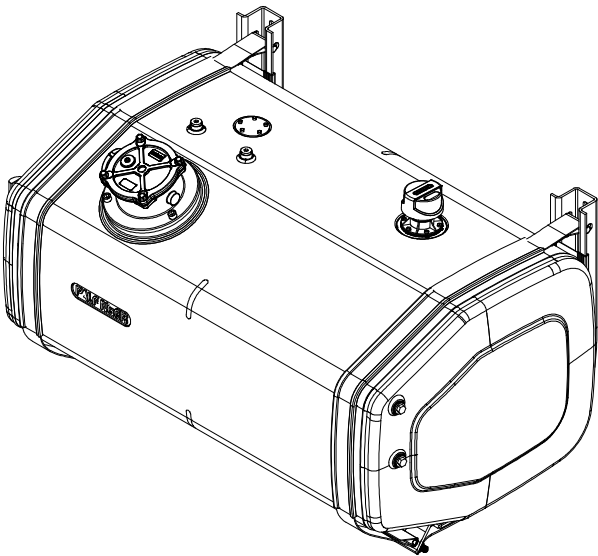


## Oil tank

060.02100

### Dimensions - KTK068-BA

Subject to change, production tolerances have to be taken into account.

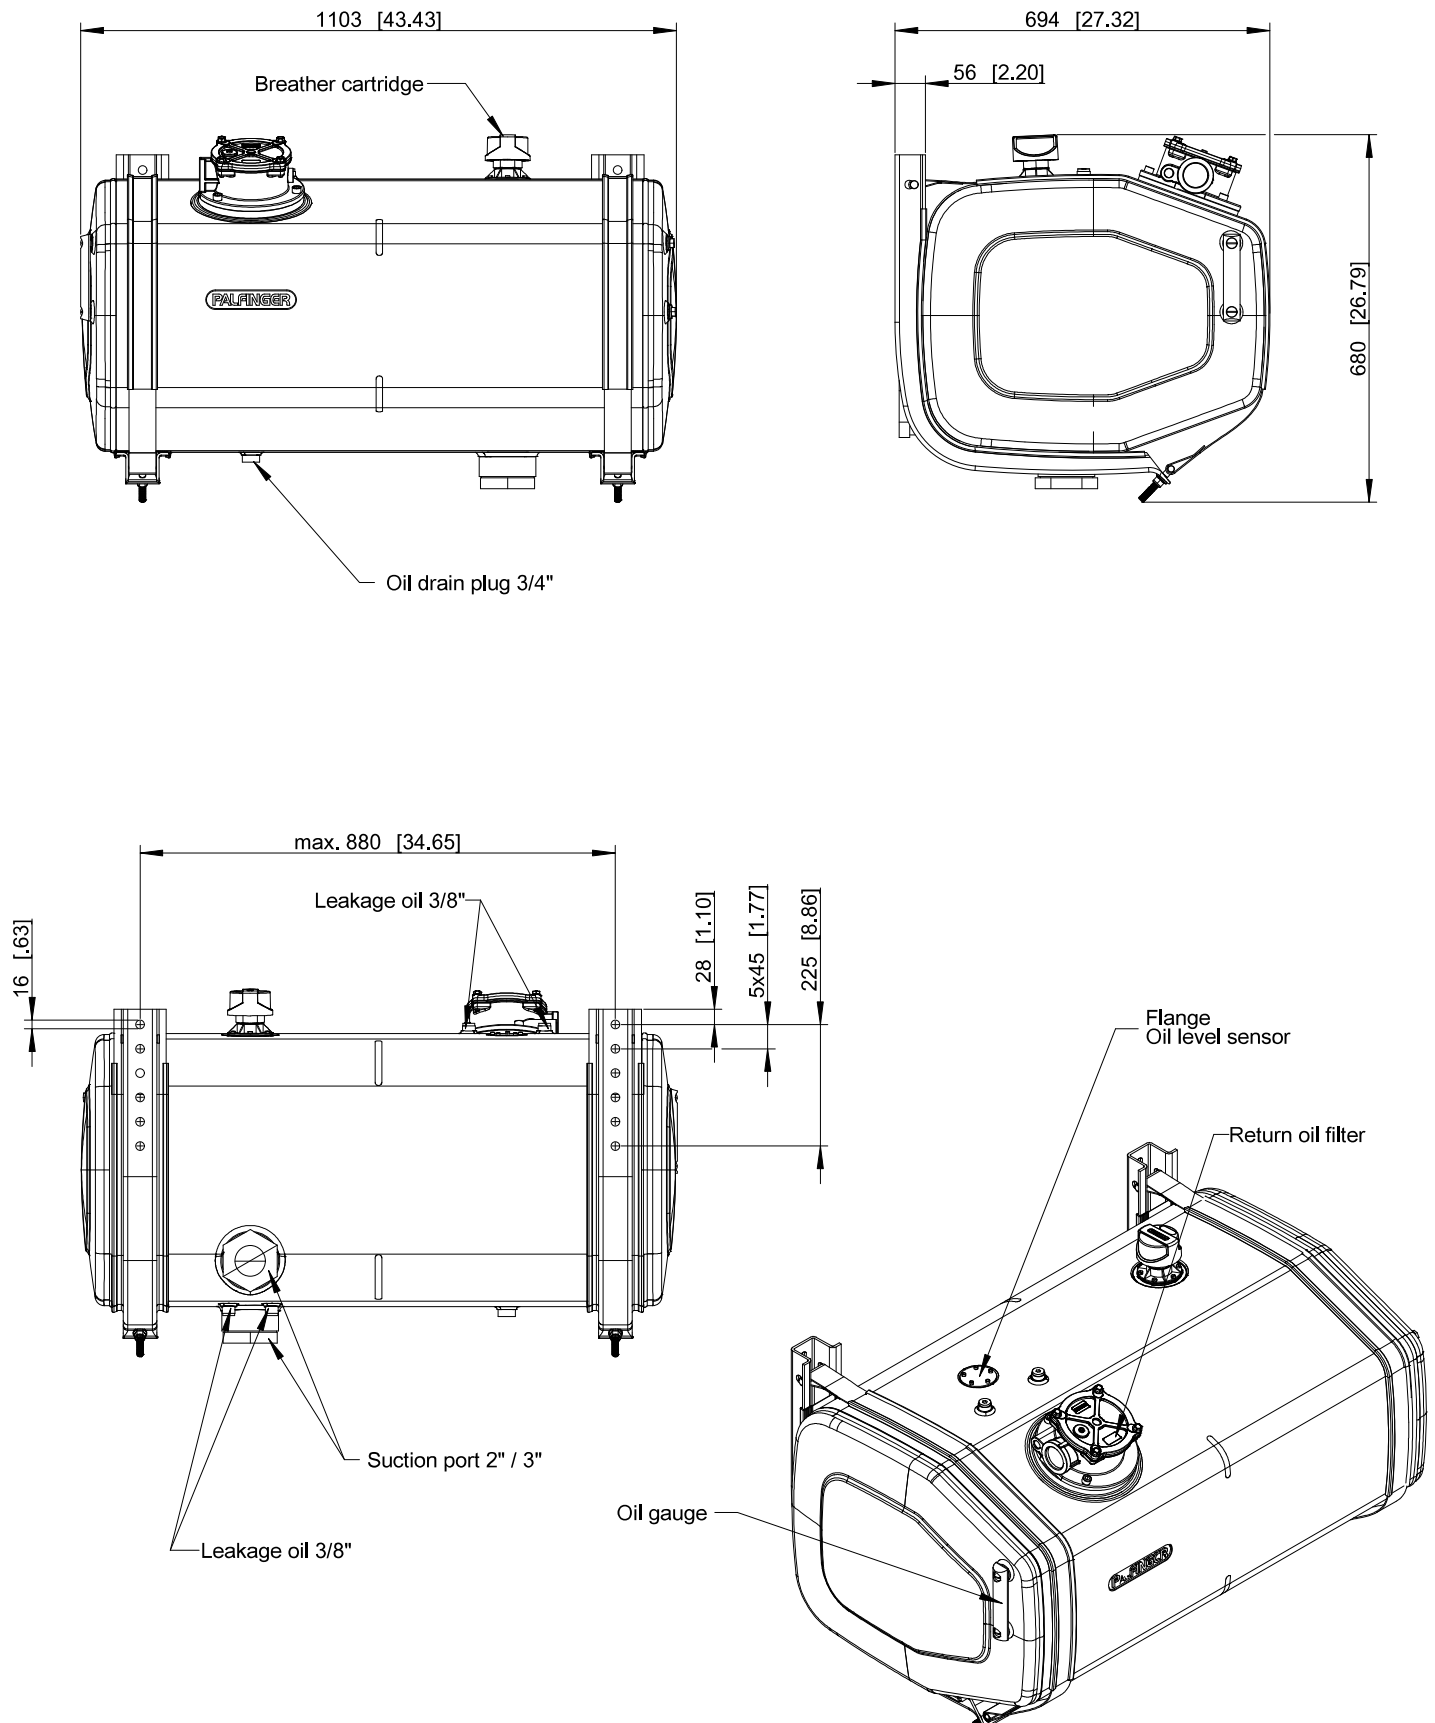


Specifications - KTK069-BA

Subject to change, production tolerances have to be taken into account.

Basic data

Tank volume	400 l [105.6 US gal]
Return oil filter	350 l/min [92.5 US gpm]
Breather cartridge	included
Oil gauge	1x
Material	<div> <div>Tank:</div> <div>Bearer:</div> <div>Tightening band:</div> </div> <div> <div>Steel zinc-coated /</div> <div>Powder coating</div> <div>Stainless steel</div> </div> <div> <div>Aluminium</div> </div>
Weight	57 kg [126 lb]

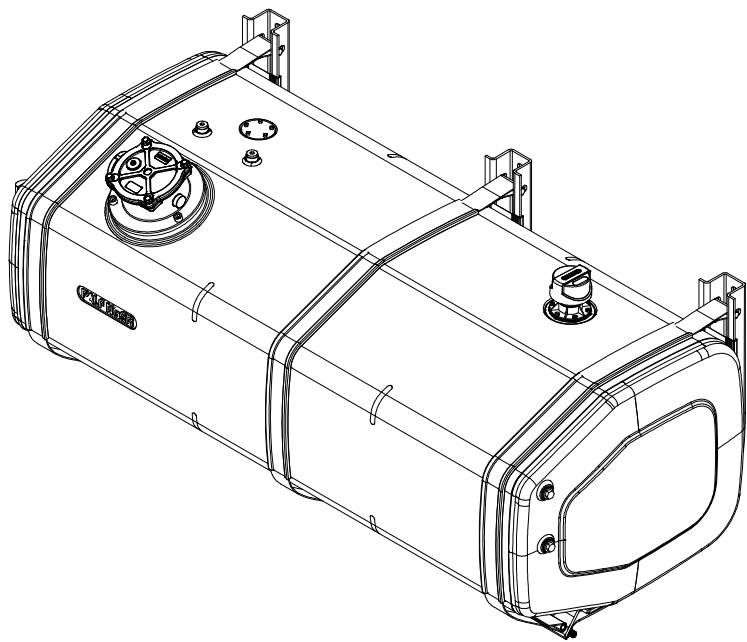

Subject to change, production tolerances have to be taken into account.

